

DuPont™ FE-36™

FIRE EXTINGUISHING AGENT

(HFC-236fa)

P-236fa

***Properties, Uses, Storage, and Handling***



*The miracles of science™*

# HFC236fa Properties, Uses, Storage and Handling

## Table of Contents

	Page
<b>Introduction</b> .....	1
<b>HFC-236fa</b> .....	1
<b>Uses</b> .....	1
Comparison to Halon 1211.....	1
Portable Fire Extinguishers.....	1
Total Flooding and Local Application.....	2
<b>Physical Properties</b> .....	2
<b>Materials Compatibility</b> .....	5
Stability with Metals.....	5
Compatibility with Elastomers.....	5
Compatibility with Plastics.....	5
<b>Safety</b> .....	6
Inhalation Toxicity.....	6
Cardiac Sensitization.....	6
Skin and Eye Contact.....	6
Spills or Leaks.....	6
<b>Storage and Handling</b> .....	7
Shipping Information for the United States.....	7
Shipping Containers.....	7
Bulk Storage Systems.....	7
Transfer of HFC-236fa from the Container.....	8
Leak Detection.....	8
Handling Precautions for HFC-236fa Shipping Containers.....	8
Nitrogen Superpressurization.....	8
Nitrogen Solubility.....	12
<b>Recovery, Recycle, Reclamation and Disposal</b> .....	13
Recovery.....	13
Reclamation.....	13
Disposal.....	13
<b>Contact Information</b> .....	back cover

## Introduction

Chlorofluorocarbons (CFC), bromofluorocarbons, and bromochlorofluorocarbons (Halons), which were developed in the 1930's, have unique properties. They are low in toxicity, non-flammable, non-corrosive, and compatible with other materials. In addition, they have thermodynamic and physical properties that make them ideal for a variety of uses. CFCs have been used as refrigerants; as blowing agents in the manufacture of insulation, packaging, and cushioning foams; as cleaning agents for metal and electronic components; and in many other applications. One high value use of Halon compounds is as fire extinguishants and explosion suppressants. They are used in hand held portable extinguishers, flooding systems, and local application systems.

However, the stability of these compounds, coupled with their bromine and/or chlorine content, has linked them to depletion of the earth's protective ozone layer. As a result, these compounds are being phased out of production. DuPont has developed environmentally acceptable alternative compounds, such as HFC-236fa.

## FE-36™ Fire Extinguishing Agent

As a fire extinguishing agent, HFC-236fa is referred to as FE-36™, a trademark of DuPont. It is intended to replace Halon 1211 in portable fire extinguishers and local application flooding applications. DuPont™ FE-36™ is a safe, clean, and electrically nonconductive agent. It is suited for use in all streaming applications, because it has a boiling point (-1.4°C [29.4°F]), which is similar to Halon 1211 (-3.4°C [26°F]). FE-36™ also has utility as a total flooding agent and explosion suppression agent.

**Table 1** gives the chemical and product information for DuPont™ FE-36™

A comparison of the key fire extinguishing properties of DuPont™ FE-36™ and Halon 1211 are shown in **Table 2**. The physical properties of FE-36™ are listed in **Table 3**.

**Table 1**  
**Product Information**

<b>Product Name:</b>	HFC-236fa
<b>Chemical Name:</b>	1,1,1,3,3,3 hexafluoropropane
<b>Formula:</b>	CF <sub>3</sub> CH <sub>2</sub> CF <sub>3</sub>
<b>CAS No.:</b>	690-39-1
<b>Molecular Wt.:</b>	152.04

## Applications

### Portable Fire Extinguishers

FE-36™ is the ideal replacement for Halon 1211 in portable fire extinguishers. FE-36™ is non-corrosive, electrically non-conductive, free of residue, low in toxicity, has an ozone depletion potential (ODP) of zero and is very effective. FE-36™ discharges as a liquid and provides an effective discharge range up to 16 ft (4.9 m). It is the agent of choice for protection of high value equipment or irreplaceable assets that would be damaged or destroyed by water, foam, carbon dioxide or dry chemical. Typical applications are communication facilities, computer rooms, control rooms, data/document storage areas, electronic manufacturing, museums, art galleries, laboratories, and aircraft.

The low acute inhalation toxicity of FE-36™ is well suited for **portable fire extinguishers onboard aircraft**. The FAA has published a Minimum Performance Standard (MPS) for clean agent portables for use onboard civilian transport aircraft (DOT/FAA/AR-01/37) HFC-236fa (FE-36™) has passed this requirement and is listed in the document as a suitable replacement for Halon 1211 portables. Aircraft are a confined space, so it is important to consider the acute inhalation toxicity of the agent used in the clean agent portables. FE-36™ has the best properties of any of the alternatives for this application.

FE-36™ is listed as an acceptable streaming agent for replacement of Halon 1211 in the EPA SNAP Program.

**Table 2**  
**Comparison of DuPont™ FE-36™ to Halon 1211**

Property	FE-36™	Halon 1211
Chemical Formula	CF <sub>3</sub> CH <sub>2</sub> CF <sub>3</sub>	CF <sub>2</sub> ClBr
Ozone Depletion Potential	0	4
Molecular Weight	152.04	165.4
Boiling Point, °C (°F)	-1.4 (29.4)	-3.4 (26)
Critical Temperature, °C (°F)	124.9 (256.9)	153.8 (308.8)
Liquid Density at 25°C (77°F), kg/m <sup>3</sup> (lb/ft <sup>3</sup> )	1360 (84.89)	1797 (112.2)
Vapor Pressure at 25°C (77°F), kPa (psia)	272.4 (39.5)	275.8 (40.0)
Heat of Vaporization at Boiling Point, kJ/kg (Btu/lb)	160 (69)	131 (57)
Extinguishing Concentration, n-heptane, cup burner, % by volume	6.4	4.1
Acute Toxicity, LC50 Rats, 4 hr- ppm	>457,000	85,000-100,000*

\*Estimated value

### Total Flooding and Local Application

FE-36™ is listed as an acceptable Halon replacement in the EPA SNAP Program for total flooding of enclosures (fixed fire extinguishing systems) and local application systems. FE-36™ is non-corrosive, electrically non-conductive, free of residue, and has an ozone depletion potential (ODP) of zero. It is ideally suited for protection high value equipment such as in computer rooms, telecommunication facilities, and aircraft.

**Total Flooding** application with FE-36™ can be used in applications where **people are normally present (normally occupied spaces)**. **Class-A fire hazards** represent greater than 90% of all commercial protection scenarios. Examples of applications where FE-36™ would be an excellent choice for a total flood fire suppression system where people are present are: computer rooms, telecommunication switch stations and facilities, semi-conductor manufacturing facilities, data processing centers, clean rooms, industrial process control rooms, museums, libraries and historical sites. FE-36™ can also be used to suppress **Class-B fire hazards**. Examples of these applications would include: engine compartments, petrochemical facilities, chemical storage rooms, paint lockers and other areas where hydro-carbon-based materials are stored or handled.

**Local application** systems are a flooding system where there is not a complete enclosure around the hazard. In this type of system it is important to establish the fire extinguishing concentration at a specific location as quickly as possible. This is accomplished using FE-36™, because of the streaming characteristic. FE-36™ discharges from the nozzle as a liquid and then vaporizes. This allows for directing the agent concentration to the hazard site quickly and maintains the extinguishing concentration in the area of the hazard longer. This type of application is used for high value machining equipment and areas where high value assets are in a large open area.

FE-36™ also has application as an explosion suppression agent.

The heptane cup burner extinguishing concentration for FE-36™ in air is 6.4% (volume).

### Physical Properties

Physical properties of HFC-236fa are shown **Table 3**.

Saturated Vapor Pressure and Density are given in **Table 4**.

Saturated Vapor Pressure vs Temperature is shown in **Figure 1** and **Figure 2**.

Thermodynamic Properties in ENG and SI units are available in DuPont Bulletins T-236fa-ENG and T-236fa-SI.


**Table 3**  
**General Property Information for HFC-236fa**

Property	
Molecular Wt.	152.04
Boiling Point @ 1 atm, °C (°F)	-1.4 (29.4)
Freezing Point, °C (°F)	-103 (-153)
Critical Temperature, °C(°F)	124.9 (256.9)
Critical Pressure, kPa (psia)	3200 (464)
Critical Density, kg/m <sup>3</sup> (lb/ft <sup>3</sup> )	551 (34.42)
Liquid Density @ 25°C (77°F), kg/m <sup>3</sup> (lb/ft <sup>3</sup> )	1360 (84.89)
Vapor Density @ 25°C (77°F) and 1 atm, kg/m <sup>3</sup> (lb/ft <sup>3</sup> )	6.481 (0.4001)
Specific Heat, Liquid @ 25°C (77°F), kJ/kg°C (BTU/lb°F)	1.265 (0.3022)
Specific Heat, Vapor @ 25°C (77°F) and 1atm, kJ/kg°C (BTU/lb°F)	0.8403 (0.2007)
Vapor Pressure, Saturated @ 25°C (77°F) kPa (psia)	272.4 (39.5)
Heat °F Vaporization @ B.P., kJ/kg (BTU/lb)	160.4 (68.97)
Thermal Conductivity, Liquid @ 25°C (77°F), W/m·°C (BTU/hr·ft·°F)	0.0729 (0.1421)
Thermal Conductivity, Vapor @ 25°C (77°F), W/m·°C (BTU/hr·ft·°F)	0.0127 (0.0074)
Viscosity, Liquid @ 25°C (77°F), cP (lb/ft-h)	0.285 (0.0691)
Relative dielectric strength @ 1 atm @ 760 mm Hg, 25°C (N <sub>2</sub> =1)	1.0166
Solubility °F Water in HFC-236fa @ 20°C (68°F), ppm	720
Solubility °F HFC-236fa in Water @ 20°C (68°F), ppm	2100
Ozone Depletion Potential, (CFC-11 = 1)	0.0
Global Warming Potential (GWP) (100 yrs ITH. for CO <sub>2</sub> , GWP = 1)	6300
TSCA Inventory Status	Reported, Included
European Classification Number (ELINCS)	EC-No: 425-320-1
SNAP Status	Listed
Inhalation Exposure Limit (8 and 12 hr TWA)	AEL=1000 ppm (v/v)


**Table 4**  
**Vapor Pressure and Density of HFC-236fa**

Temperature		Saturated		Density			
		Vapor Pressure		Liquid at Saturation		Vapor at 1 atm	
°C	°F	kPa	psia	kg/m <sup>3</sup>	lb/ft <sup>3</sup>	kg/m <sup>3</sup>	lb/ft <sup>3</sup>
0	32	107.6	15.6	1440	89.91	7.0994	0.4432
5	41	131.6	19.1	1425	88.94	6.9493	0.4338
10	50	159.7	23.2	1409	87.95	6.8067	0.4249
15	59	192.2	27.9	1393	86.95	6.6711	0.4165
20	68	229.6	33.3	1376	85.93	6.5418	0.4084
25	77	272.4	39.5	1360	84.89	6.4182	0.4007
30	86	321.0	46.6	1343	83.83	6.3000	0.3933
35	95	376.0	54.5	1325	82.74	6.1867	0.3862
40	104	437.8	63.5	1308	81.63	6.0779	0.3794
45	113	507.0	73.5	1289	80.48	5.9733	0.3729
50	122	584.2	84.7	1270	79.30	5.8727	0.3666
55	131	669.9	97.2	1251	78.08	5.7758	0.3606
60	140	764.7	111	1230	76.80	5.6823	0.3547
65	149	869.4	126	1209	75.47	5.5921	0.3491
70	158	984.5	143	1187	74.07	5.5049	0.3437
75	167	1111	161	1163	72.60	5.4207	0.3384
80	176	1249	181	1138	71.02	5.3391	0.3333
85	185	1400	203	1111	69.34	5.2602	0.3284
90	194	1565	227	1081	67.51	5.1837	0.3236
95	203	1744	253	1049	65.50	5.1095	0.3190
100	212	1940	281	1014	63.27	5.0376	0.3145

**Figure 1. Saturated Vapor Pressure, SI**

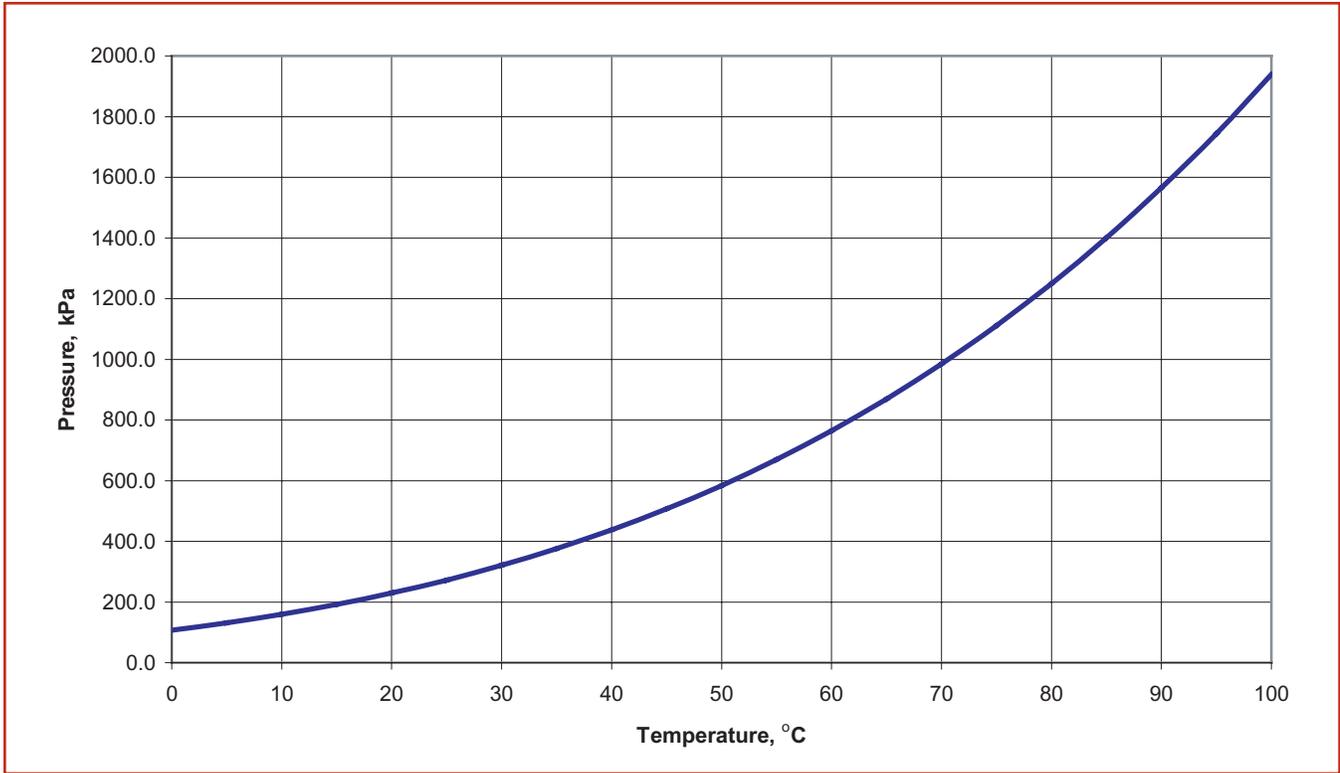

**Figure 2. Saturated Vapor Pressure, ENG**

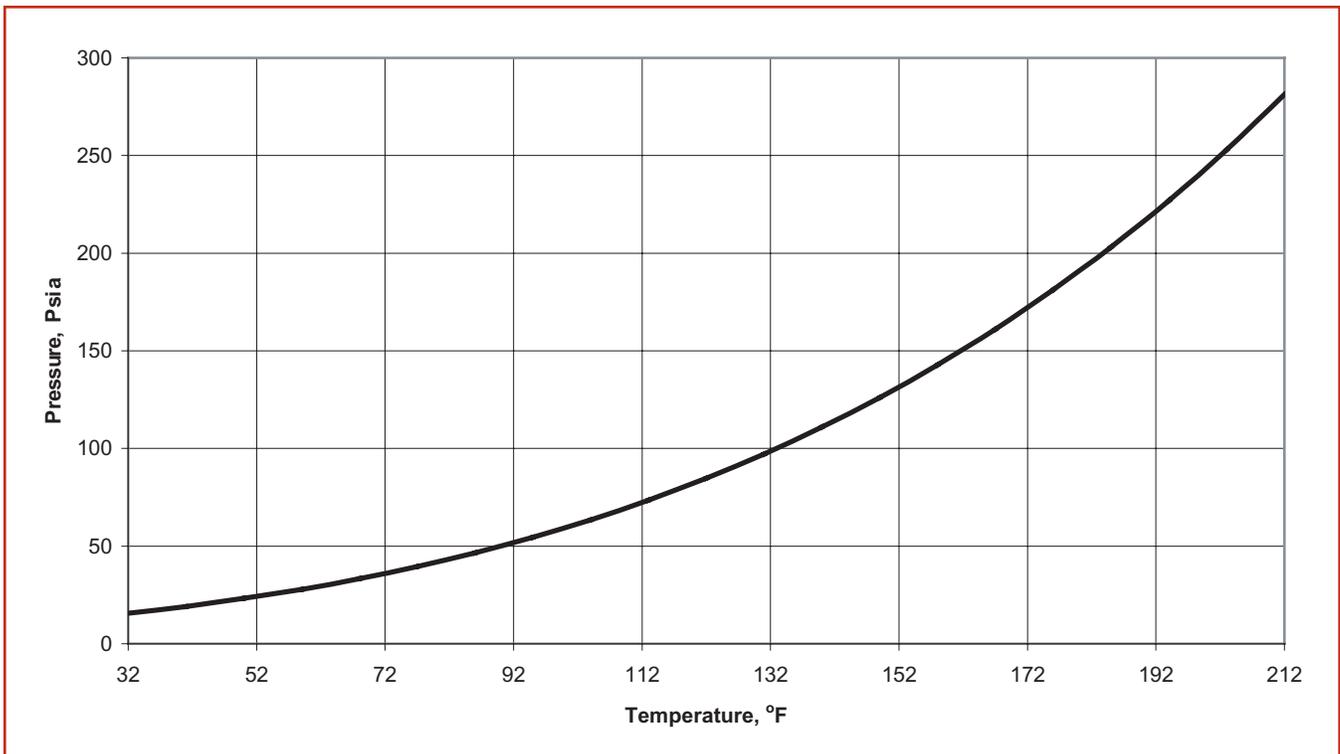

## Materials Compatibility

It is important to review the materials of construction for compatibility when designing new equipment, retrofitting existing equipment or preparing storage and handling facilities.

### Metals

Stability tests were conducted in heavy walled glass tubes in accordance with ASHRAE 97. The tests were conducted with copper, aluminum, and iron strips immersed 50% in liquid HFC-236fa and were aged for 14 days at 175°C (347°F). Visual ratings were obtained on both the liquid and the metals after the exposure. There were no changes in the color of the liquid or the condition of the metals at the conclusion of this test.

DuPont™ FE-36™ like other halocarbons may react violently with highly reactive metals such as the alkali and alkaline earth metals, sodium, potassium and barium, in the free metallic form. Some metals become more reactive when finely ground or powdered, in this state magnesium and aluminum may react, especially at higher temperatures. Highly reactive metals should not be brought into contact with DuPont™ FE-36™ until a careful study is made and appropriate safety precautions are taken.

## Plastics and Elastomers

Compatibility tests with elastomers were performed similar to the metals stability test, except the aging was done at room temperature (23°C [74°F]) for 2 weeks. This test indicates that nine out of the ten common elastomers exhibit negligible swelling, weight gain, or hardness change after exposure. This is shown in **Table 5**.

### Compatibility with Plastics

Compatibility tests with plastics were performed to determine if HFC-236fa would damage plastics if in direct path of a discharge from a fire suppression system. In this test plastic surfaces were sprayed with HFC-236fa liquid. Other pieces of plastics were placed in an atmosphere of 20% (volume) HFC-236fa for 168 hours (7 days) at atmospheric pressure and 23°C (74°F). This test indicates that all of the common plastics that were tested exhibited negligible weight gain or surface change after exposure. This is shown in **Table 5a**.

Compatibility tests performed by the National Institute of Standards and Technology (NIST) at elevated temperatures (150°C [302°F]) has identified compatible combinations of metals, elastomers and plastics. They are available in NIST publications.

**Table 5  
Elastomer Compatibility**

Elastomer	Linear Swell (%)	Weight Gain (%)	Hardness Change (units)
Butyl	0	1	0
Nordel® EPDM	1	2	-2
Neoprene® CR	-1	1	3
NBR	1	3	-4
Hypalon® CSM	-1	1	-1
Viton® A	15	51	-13
Epichlorohydrin homopolymer	-1	1	0
FA polysulfide	-1	1	-1
Hytrel® TPE	2	7	1
Teflon® PTFE	—	2	—

**Table 5a  
Plastic Compatibility**

Plastic	Weight Gain (%)	Surface Condition
High-density polyethylene (HDPE)	<1	No Change
Polystyrene (PS)	<1	No Change
Polypropylene (PP)	<1	No Change
Acrylonitrile-butadiene-styrene (ABS)	<1	No Change
Polycarbonate (PC)	<1	No Change
Polymethyl methacrylate (PMMA)	<1	No Change
Nylon 66	<1	No Change
Polyimide (PI)	<1	No Change
Polyethylene terephthalate (PET)	<1	No Change
Polybutylene terephthalate (PBT)	<1	No Change

## **Desiccants**

Driers filled with desiccant are typically used in halocarbon recycle systems and bulk storage facilities. A common molecular sieve desiccant used with CFC-114, UOP's 4A-XH-5, is not compatible with HFC-236fa. However, manufacturers have developed other molecular sieve desiccants that perform well with HFC-236fa. UOP XH-7 and XH-9 or Grace MS 592 or MS 594 desiccants may be used in loose filled driers. Compacted bead dryers, in which the desiccant is compacted by mechanical pressure, may use XH-6 in addition to the desiccants listed above.

## **Safety**

Users of HFC-236fa should read and understand the DuPont Material Safety Data Sheet (MSDS). Copies of the HFC-236fa MSDS can be obtained from DuPont Customer Service or International Offices (see last page of this document for locations and telephone numbers) or from any DuPont authorized distributor.

## **Inhalation Toxicity**

HFC-236fa poses no acute or chronic hazard when it is handled in accordance with DuPont recommendations and when the exposure is maintained below the recommended exposure limits. The DuPont Acceptable Exposure Limit (AEL) is 1000 ppm (8 or 12 hour time weighted average).

However, inhaling high concentrations of HFC-236fa vapor may cause temporary nervous system depression with anesthetic effects such as dizziness, headache, confusion, loss of coordination and even loss of consciousness. Higher exposures to the vapors may cause temporary alteration of the heart's electrical activity with irregular pulse, palpitations, or inadequate circulation. Intentional misuse or deliberate inhalation may cause death without warning.

If a person is experiencing any of the initial symptoms, they should be moved to fresh air and kept calm. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Seek medical attention.

## **Cardiac Sensitization**

If vapors are inhaled at a concentration of 150,000 ppm or greater, which is well above the AEL, the heart may become sensitized to adrenaline, leading to cardiac irregularities and, possibly, cardiac arrest. Similar effects are observed with many hydrocarbons and halocarbons at high concentrations. The likelihood of these cardiac problems increases if the person is under physical or emotional stress.

Because of possible disturbances of cardiac rhythm, catecholamine drugs, such as epinephrine, should be considered only as a last resort in life threatening emergencies.

The threshold cardiac sensitization, LOAEL (Lowest Observed Actual Exposure Level), for HFC-236fa is 150,000 ppm (15%) and the NOAEL (No Observed Actual Exposure Level), is 100,000 ppm (10%).

## **Skin and Eye Contact**

At room temperature, HFC-236fa vapors have little or no effect on the skin or eyes. However, in the liquid form, HFC-236fa can freeze the skin or eyes on contact, causing frostbite. If contact with liquid does occur, soak the exposed area in lukewarm water, not cold or hot. In all cases, seek medical attention as soon as possible.

Always wear protective clothing when there is a risk of exposure to liquid HFC-236fa. Where splashing of HFC-236fa may occur, always wear eye protection and a face shield.

## **Spills or Leaks**

If a large release of vapors occurs, such as from a large leak or spill, the vapors may concentrate near the floor or in low elevation areas and displace the oxygen available for breathing, causing suffocation.

Evacuate everyone until the area has been well ventilated. Use blowers or fans to circulate the air at floor level. Do not re-enter the affected area without self-contained breathing apparatus or unless the area has been monitored to indicate that the concentration of HFC-236fa vapors in the area is below the AEL.

Always use self-contained breathing apparatus or a supplied air mask when entering tanks or other areas where vapors might exist. Use the buddy system and a lifeline. Refer to the HFC-236fa MSDS for more information.

HFC-236fa vapors have virtually no odor. Therefore, frequent leak checks or the installation of area monitors are necessary in enclosed areas where leaks can occur.

To ensure safety when working with halocarbons in confined areas:

1. Route relief and purge vent piping (if used) outdoors, away from air intakes.
2. Make certain the area is well ventilated, using auxiliary ventilation, if necessary, to move vapors.
3. Make sure the area is clear of vapors prior to beginning work.
4. Utilize monitoring equipment to detect leaks.

## Storage and Handling

### Shipping Containers in the United States

HFC-236fa is a liquefied compressed gas. According to the U.S. Department of Transportation (DOT), a gas is a material that has a vapor pressure of >43.5 psi @ 50°C or completely vapor @ 20°C. A liquefied gas is defined as a gas, which in a packaging under the charged pressure is partially liquid @ 20°C. The appropriate DOT designation is as follows:

Proper shipping name:	Hexafluoropropane
Hazards class:	Not Regulated
UN No.:	
DOT/IMO Labels:	Not Regulated

### Containers

Two types of containers are used for shipping HFC-236fa. A description of the containers is provided in **Table 6**.

The **123-lb water capacity cylinder** is designed for fire extinguishing agent applications. This cylinder can contain up to 145 lb of HFC-236fa. These cylinders are equipped with a "Pressure Flow" liquid/vapor valve. This valve body allows liquid to be removed through the CGA-660 connector without inverting the cylinder. The hand wheel for liquid removal is on the top of the valve. The liquid valve port is attached to a dip tube, which extends to the bottom of the cylinder. Vapor is removed through the CGA-165 connection on the side of the valve. The small hand wheel on the side of the valve is used for vapor removal.

The **1000-lb water capacity cylinder** is designed for fire extinguishant and refrigerant applications. This is a palletized cylinder that can contain up to 1200 lb of HFC-236fa. These cylinders are equipped with two (2) liquid/vapor valves with a CGA-660 connector. This valve body allows liquid to be removed without inverting the cylinder. The handwheel for liquid removal is on the side of the valve. The liquid valve port is attached to a dip tube, which extends to the bottom of the cylinder. Vapor is removed through the same fitting by using the vapor handwheel on the top of the valve.

### Bulk Storage Systems

DuPont sells bulk storage systems to its FE-36™ customers. The systems are prefabricated, tested, and ready to install onsite. The units are designed to optimize economy, efficiency, and safety in the storage and dispensing of FE-36™. The delivered systems include all components, such as storage tanks, pumps, piping, valves, motors, and gauges, as an integrated unit. All systems are equipped with the DuPont Fluorochemical Emissions Elimination Delivery (FEED) System to prevent emissions during deliveries and with dual pumps to provide an installed spare. The units are skid-mounted and require only placement on a concrete pad and connection to electrical and process systems.

Your DuPont Marketing Representative can arrange for guidance on site selection, purchase, installation, startup, and maintenance.

**Table 6**  
**Specifications of Shipping Containers for HFC-236fa**

<b>Water Capacity, lb (kg)</b>	<b>Dimensions</b>	<b>DOT Specification</b>	<b>Net Weight HFC-236fa, lb (kg)</b>
123 (54)	55" H × 10" OD	4BA300	145 (65.8)
1000 (454)	50" H × 30" OD	4BW260	1200 (544)
Tank Trailer	8,927 L (5,000 gal)	MC-330 or -331	37,000 (16,784)

### **Transfer of HFC-236fa from the Container**

The preferred method for transfer of liquid HFC-236fa from the cylinder is to use a suitable pump. There are several industrial pumps suitable for the transfer of HFC-236fa. Contact an industrial pump manufacturer for the recommended pump.

The receiving container should be evacuated to eliminate contamination by air and to facilitate transfer of HFC-236fa.

If a pump is not available the chilled transfer line method will facilitate transfer of HFC-236fa to the receiving container. This method chills the transfer line as the material flows from the supply container to the receiver. A coil of copper refrigeration tubing is placed in the transfer line between the supply and the receiver. The coil is placed in a cold bath, such as water ice or carbon ice.

### **Leak Detection**

Whenever a system is assembled or serviced, it should be checked for leaks. There are many commercially available leak detectors. These devices are readily available through a refrigeration contractor or service store.

A detailed discussion of leak detection, along with a list of manufacturers of leak detection equipment, is available in DuPont Bulletin ARTD-27 (H-31753-2).

### **Handling Precautions for HFC-236fa Shipping Containers**

The following rules for handling HFC-236fa containers are strongly recommended:

- Use personal protective equipment, such as side shield glasses, gloves, and safety shoes when handling containers.
- Avoid skin contact with liquid HFC-236fa, it can cause frostbite.
- Never heat a container to a temperature higher than 52°C (125°F).
- Never refill returnable cylinders without DuPont consent. DOT regulations forbid transportation of returnable cylinders refilled without DuPont's authorization.
- Never use a magnet or sling (rope or chain) to lift containers. Lifting may be accomplished by the use of a safe cradle or platform basket that holds the container.

- Never use containers as rollers, supports, or any other purpose than to contain HFC-236fa.
- Protect containers from any objects that will result in a cut or other abrasion in the surface of the metal.
- Never tamper with the safety devices in the valves or container.
- Never attempt to repair or alter containers or valves.
- Never force connections that do not fit. Make sure the threads on the regulator or other auxiliary equipment are the same as those on the valve outlets.
- Keep valves tightly closed, with valve caps and hoods in place when the container is not in use.
- Store containers under a roof to protect them from weather extremes.
- Use a vapor recovery system to collect HFC-236fa vapors from lines after unloading.

### **Nitrogen Superpressurization of DuPont™ FE-36™**

FE-36™ is shipped in cylinders that contain essentially pure FE36™. These containers are evacuated before filling to remove air, and the FE-36™ contains less than 1.2% (vol.) noncondensable gases (air, nitrogen, etc.) in the vapor space. The pressure in these cylinders is therefore due to the vapor pressure of FE-36™ alone. In fire suppression applications, it is often desirable to increase the available pressure above the vapor pressure of FE-36™. In these cases, nitrogen is added to the FE-36™ after transfer to accomplish this pressure increase and is called "superpressurization." Superpressurization may be for one or more of the following purposes:

- To increase the total pressure available for flow from the container through down-stream piping systems.
- To provide a "pressure-pad" for the liquid in order to keep the liquid "compressed" in the liquid phase during flow-through piping systems. This prevents a two-phase flashing flow situation, and simplifies calculation of flows in pipelines.
- To stabilize the container pressure over a wide temperature range or, specifically, to maintain significant storage pressures at low temperatures.

To determine the amount of nitrogen required for superpressurization of FE-36™ at various fill densities, it is necessary to understand the solubility relationship of nitrogen and FE-36™. Extensive experimental work was conducted by DuPont’s Central Research and Development group to develop this information. The Peng-Robinson Equation of State (PREOS) was then used to calculate the following:

- Weights of nitrogen required for superpressurization
- Isometric diagrams
- Henry’s Law Constants

**Tables 7a** and **7b** provide the weight of nitrogen required to pressurize a given amount of FE-36™ to 360 psig (2500 kPa, gauge) and 600 psig (4150 kPa, gauge). Isometric diagrams of FE-36™ superpressurization to 360 psig and 600 psig at 70° are shown in **Figures 3** and **4**. **Figures 5** and **6** show the isometric diagrams of FE-36™ superpressurized to 2500 kPa, gauge and 4150 kPa, gauge at 21°C.


**Table 7a**  
**Weight of Nitrogen Required for Superpressurization of DuPont™ FE-36™**

Weight of nitrogen per lb of HFC-236fa at 70°F		
Fill Density lb/ft <sup>3</sup>	Amount of Superpressure 360 psig	Amount of Superpressure 600 psig
	<b>oz</b>	<b>oz</b>
40	0.528	0.899
45	0.452	0.770
50	0.392	0.666
55	0.342	0.581
60	0.301	0.511
65	0.266	0.451
70	0.236	0.400
75	0.211	0.355
80	0.188	0.316


**Table 7b**  
**Weight of Nitrogen Required for Superpressurization of DuPont™ FE-36™**

Weight of nitrogen per kg of HFC-236fa at 21°C		
Fill Density kg/m <sup>3</sup>	Amount of Superpressure 2500 kPa (gauge)	Amount of Superpressure 4150 kPa (gauge)
	<b>g</b>	<b>g</b>
600	36.15	61.390
700	29.62	50.230
800	24.73	41.860
900	20.92	35.350
1000	17.87	30.150
1100	15.38	25.880
1200	13.30	22.330
1300	11.54	19.330


**Figure 3. Isometric Diagram – DuPont™ FE-36™ Pressurized with Nitrogen to 360 psig at 70°F**

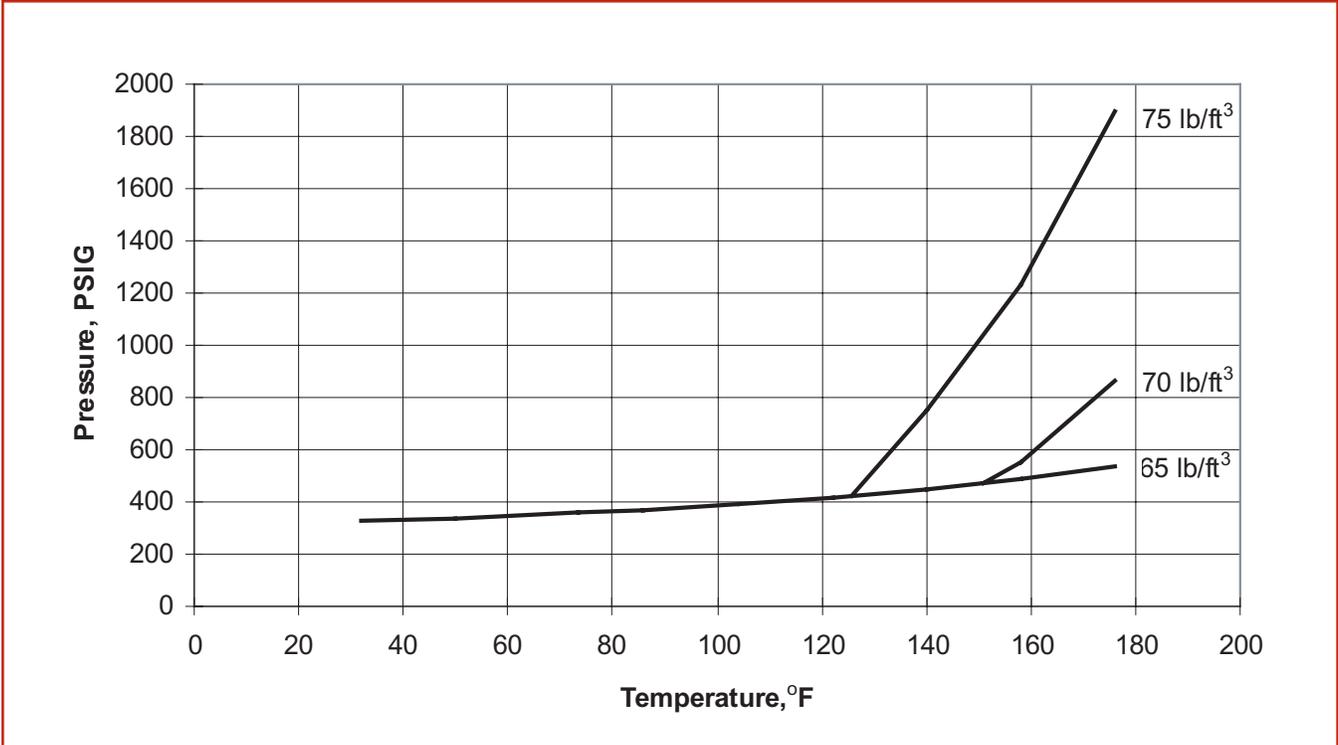


**Figure 4. Isometric Diagram – DuPont™ FE-36™ Pressurized with Nitrogen to 600 psig at 70°F**

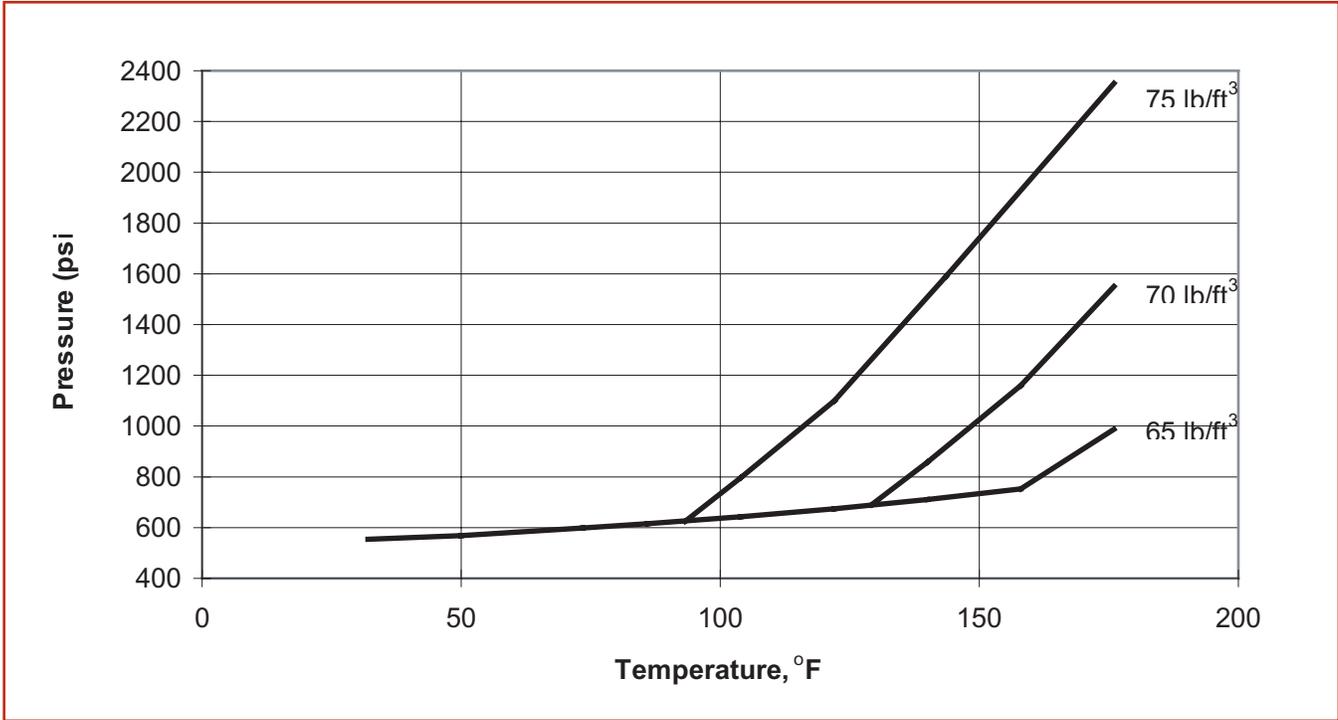

**Figure 5. Isometric Diagram – DuPont™ FE-36™ Pressurized with Nitrogen to 2500 kPa at 21°C**

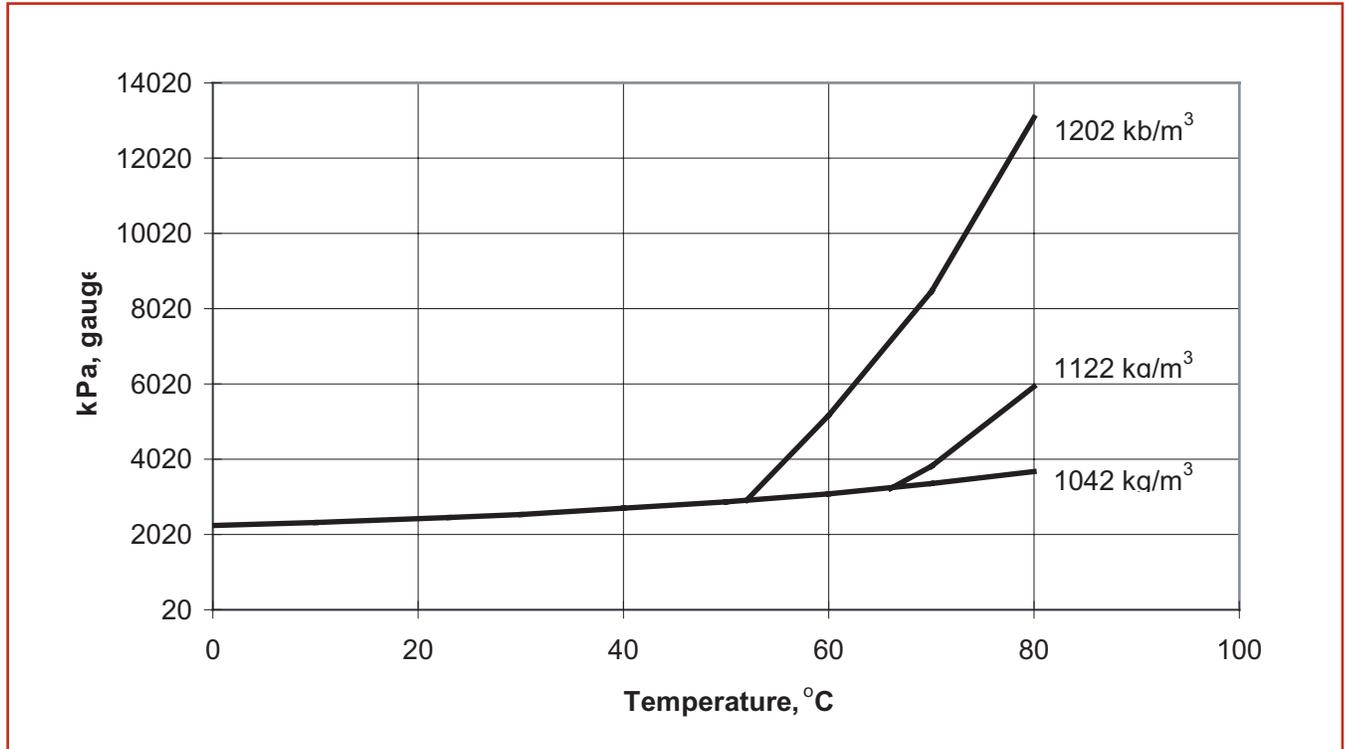


**Figure 6. Isometric Diagram – DuPont™ FE-36™ Pressurized with Nitrogen to 4150 kPa at 21°C**

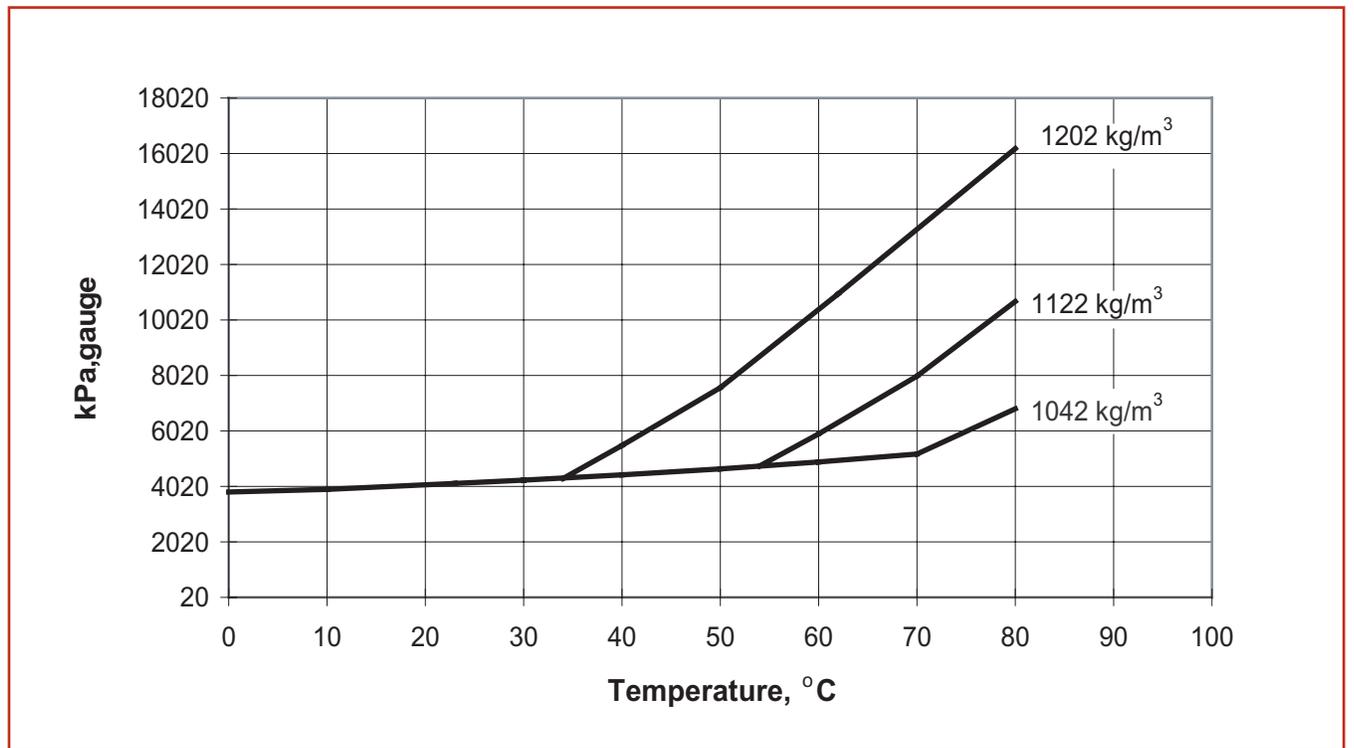


## Henry's Law Constants

PREOS was also used to calculate the Henry's Law Constants as shown in **Figure 7** (ENG units) and **Figure 8** (SI units).

**Figure 7. Henry's Law Constant for Nitrogen Solubility in DuPont™ FE-36™ (SI Units)**

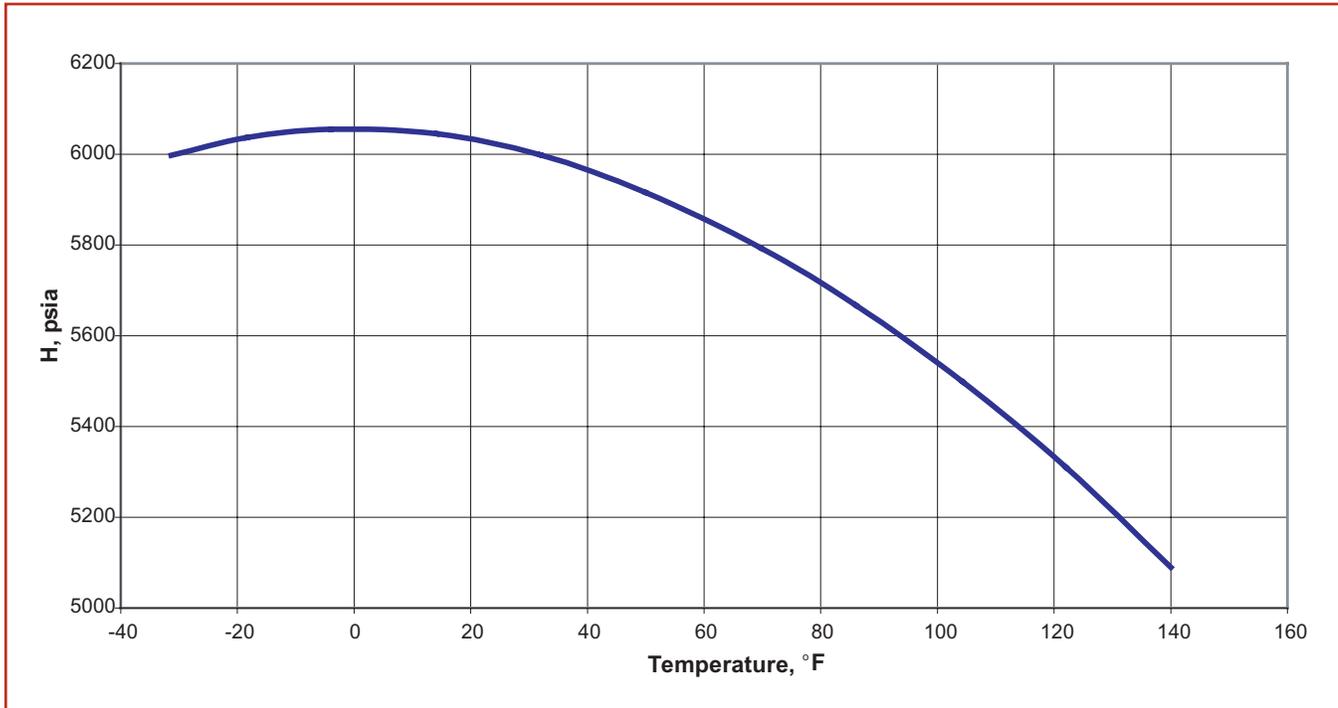

**Figure 8. Henry's Law Constant for Nitrogen Solubility in DuPont™ FE-36™ (ENG Units)**

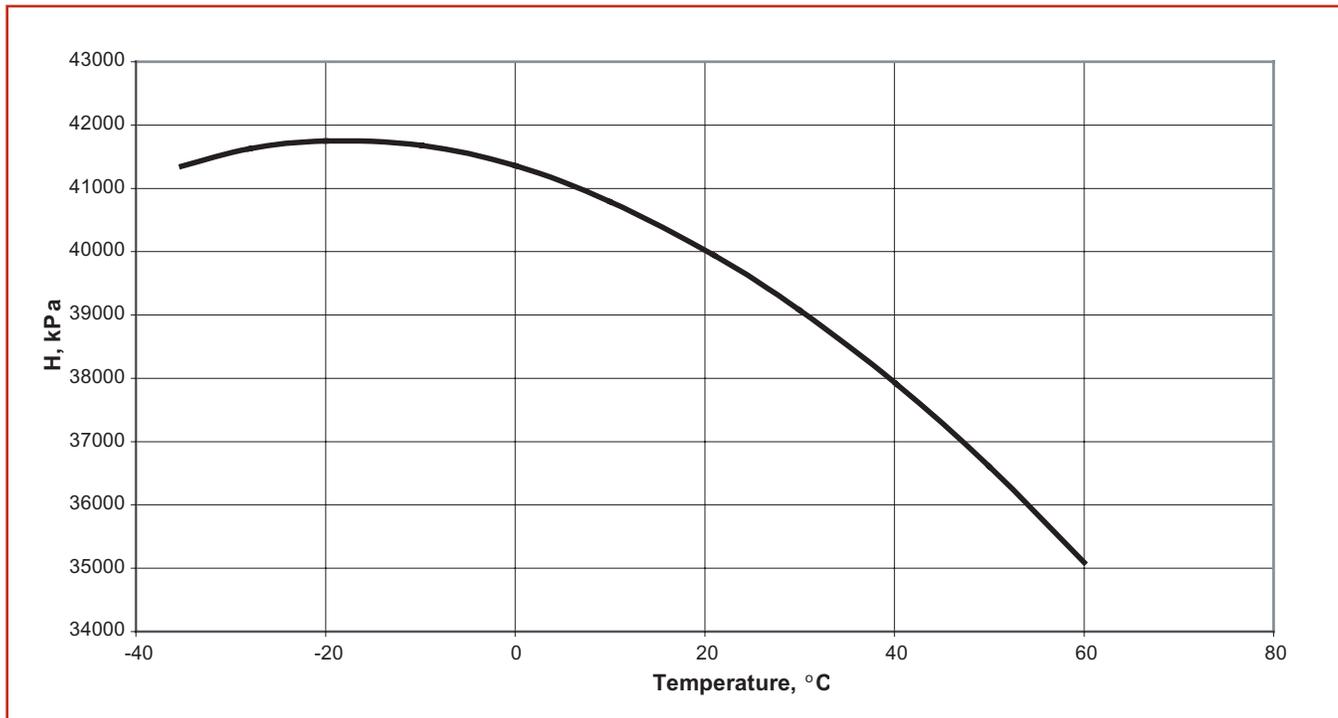

## **Recovery, Recycle, Reclamation, and Disposal**

Responsible use of HFC-236fa requires that the product be recovered for reuse or disposal whenever possible. Recovery and reuse makes sense from an environmental and economic standpoint.

### ***Recovery***

Recovery refers to the removal of HFC-236fa from equipment and collection in an appropriate external container. Recovery does not involve processing or analytical testing. But if the system contains nitrogen or other gas to super-pressurize, it must be identified on the label. This is normally performed when a system must undergo maintenance and the HFC-236fa returned to the system after completion. There are a number of recovery devices on the market. These devices contain a compressor and an air cooled condenser, and may be used for liquid or vapor recovery. At the end of the recovery the system is evacuated to remove vapors. Before purchasing a specific recovery unit, check with the manufacturer to be sure that it contains the elastomeric seals and compressor oil compatible with HFC-236fa.

### ***Reclamation***

Reclamation refers to the reprocessing of HFC-236fa recovered from a system to new product specifications. Quality of the reclaimed product is verified by chemical analysis. In the United States HFC-236fa is included in DuPont's reclamation program. Contact DuPont or one of its authorized distributors for further information.

### ***Disposal***

Disposal refers to the destruction of used HFC-236fa. Disposal may be necessary when HFC-236fa has become contaminated with other materials and no longer meets the acceptable specifications of DuPont or other reclaimer. DuPont does not presently accept severely contaminated HFC-236fa for disposal; licensed waste disposal firms are available. Be sure to check the qualifications of any firm before sending them used HFC-236fa.

---

**For further information regarding DuPont Fire Extinguishing Agents, contact:**

***United States***

DuPont Fluoroproducts  
Chestnut Run Plaza 702-1274-E  
Wilmington, DE 19880-0702  
Fax: 302-999-4727

***South America***

DuPont Argentina  
Ing. Butty 240 – Piso 10°  
C1001AFB-Buenos Aires – Argentina  
Tel: 5411-4-021-4783

***Europe, Middle East, and Africa***

DuPont de Nemours  
International S.A.  
2, Chemin du Pavillon  
CH-1218 Le Grand-Saconnex  
Geneva, Switzerland  
Tel: 41-22-717-5376  
Fax: 41-22-717-6169

***Asia Pacific***

DuPont Malaysia Sdn Bhd  
6th Floor, Bangunan Samudera,  
1 Jln Kontraktor U1/14  
Hicom-Glenmarie Industrial Park  
40150, Shah Alam,  
Selangor, Malaysia  
Tel: 60-3-5567 2534  
Fax: 60-3-5569 2994

DuPont Taiwan Limited  
13F, Hung Kuo Building  
167 Tun Hwa North Road  
Taipei, Taiwan 105  
ROC  
Tel: 886-2-25144488  
Fax: 886-2-25457098

DuPont China Co., Ltd.  
15th Floor  
Shui On Plaza  
333 Huai Hai Road (Central)  
Shanghai, 200021, China  
Tel: 86-21-63866366  
Fax: 86-21-63866333

DuPont Fareast Inc. Philippines  
19/F GT Tower International  
6815 Ayala Ave. Corner H.V. Dela  
Costa St.  
Makati City, Philippines  
1227  
Tel: 011 63 2 818 9911

**[cleanagents.dupont.com](http://cleanagents.dupont.com)**

---

Copyright © 2007 DuPont or its affiliates. All rights reserved. The DuPont Oval Logo, DuPont™, The miracles of science™, and FE™, are registered trademarks or trademarks of E. I. du Pont de Nemours and Company or its affiliates.

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT PERMISSION OF DUPONT.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

